



# Robo-Steam - Automatic Belt Conveyor Washing System for modular belts

*Steam cleaning for modular belts*

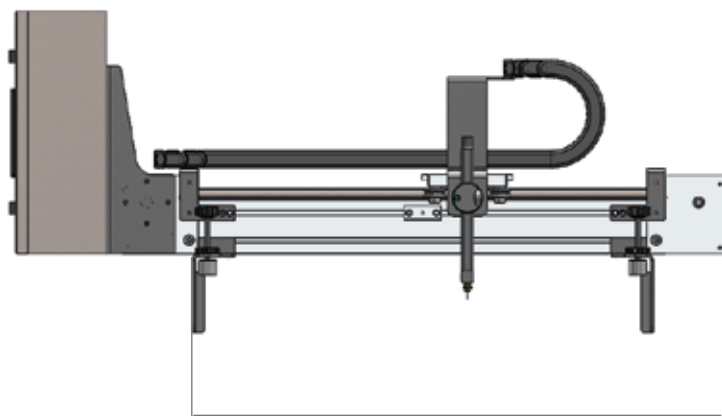

from 20 to 2000 mm  
customizable for every type of plant

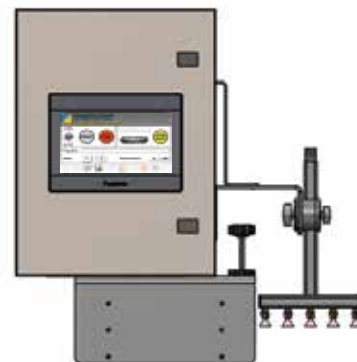

comb or twister vaporization system



## Technical data

Working width range from 20 to 2000 mm
Powered by brushless motor motor with height control
Speed 2 m/sec (settable speed and acceleration / deceleration values)
Power supply 230 V 50/60 Hz
Linear axis with sliding carriages on rollers to ensure maximum cleaning
Omron plc with encorder;
Aluminium and stainless steel construction;
Operating pressure 10 bar;
Twister (optional) 200 mm or 300 mm;
Weintek 7" color multifunction panel;



The automatic belt washer is equipped with a 7" control panel to set belt functions such as belt length, speed, number of sector, etc..

To be used with:



HIGH-STEAMER



VISIT THE  
WEBSITE



WATCH THE  
VIDEO